

TR332CU

Composite Graphite Sheet


LiPOLY TR332CU is a complex thermally conductive film, composed of graphite radiator which can be laminated on copper foil to superior thermal management and ease of manufacture. TR332CU can be supplied in various manufacturing friendly formats and custom die-cut for the ultimate convenience.

■ FEATURES

- / Excellent heat transfer
- / Manufacturing friendly form-factor
- / Can be custom die-cut
- / Flexibly conforms to surfaces

■ TYPICAL APPLICATION

- / Set top box
- / Notebook Computers
- / Projector
- / Mobile phone
- / Hand held devices
- / 5G base station & infrastructure
- / EV electric vehicle

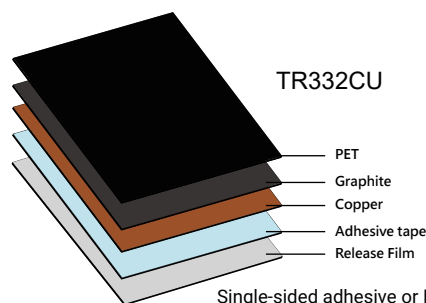

TR332CU

■ SPECIFICATIONS

- / Sheet form
- / Die-cut parts

■ TYPICAL PROPERTIES

Single-sided adhesive or PET can be added according to needs

PROPERTY	TR332CU		TEST METHOD	UNIT
Color	Black		Visual	-
Thickness	0.10	0.15	ASTM D374	mm
TML	<0.1	<0.1	By LiPOLY	%
Application temperature	-60~120	-60~120	-	°C
Short time temp. @30sec	150	150	-	°C
ADHESION				
Initial tack	25	11	PSTC-6	cm
RADIATION				
Heat emissivity coefficient	0.96	0.96	ASTM C1371	-
ELECTRICAL				
Dielectric breakdown	1.0	1.5	ASTM D149	KV
Surface resistivity	>10 ¹¹	>10 ¹¹	ASTM D257	Ohm
Volume resistivity	>10 ¹¹	>10 ¹¹	ASTM D257	Ohm-m
THERMAL				
Thermal conductivity XY axis	1500	1500	AC calorimeter	W/m*K
Thermal conductivity Z axis	1.2	1.2	Laser flash	W/m*K

Note: All specifications provided by LiPOLY are subject to change without notice. The test methods used by LiPOLY are based on the TIM Tester method and ASTM D5470 test method. These test methods are used as the definition standards for LiPOLY. Property values provided in this document are not for product specifications or guaranteed. This document does not guarantee the performance and quality required for the purchaser's specific purpose. The purchaser needs to evaluate and verify the safety before using the material. We strongly recommend the purchaser pre-test the product and verify the performance of the product under the purchaser's specific conditions. Liability and use of the product are the responsibility of the end user. LiPOLY makes no warranty as to the suitability, merchantability, or non-infringement of any LiPOLY material or product for any specific or general uses. LiPOLY shall not be liable for incidental or consequential damages of any kind. All LiPOLY products are sold in accordance with the LiPOLY Terms and Conditions in effect at the time of purchase and a copy of which will be furnished upon request. All rights reserved, including LiPOLY trademarks or registered trademarks of LiPOLY or its affiliates. Statements concerning possible or suggested uses made herein shall not be relied upon or be constructed as a guaranty of patent infringement. Copyright LiPOLY.