

N800BH

Non-Silicone Thermal Conductive Pad

LiPOLY Non-Silicone Thermal Compound N800BH is made of non-silicone resin material. No low molecular siloxane volatilization and low total volatile gas, no electrical contact & pollution problems. N800BH is flexible and has great thermal conduction, Low compressive stress and high compressive characteristics can effectively reduce the stress load of components, so that the equipment only needs to bear less mechanical stress, and at the same time, it can have low thermal resistance and high thermal conductivity.

■ FEATURES


- / Thermal conductivity: 11.0 W/m·K
- / It's made by non-silicone resin materials
- / Low contact thermal resistance
- / With electrical insulation
- / Outstanding thermal conductivity
- / Applicable to optical and sensitive electric components

■ TYPICAL APPLICATION

- / HDDS
- / Optical appliance
- / 5G base station & infrastructure
- / EV electric vehicle

■ SPECIFICATIONS

- / Sheet form
- / Die-cut parts

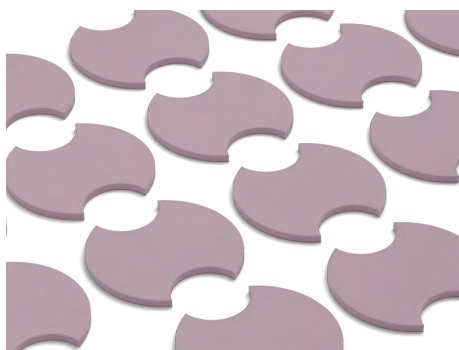


■ TYPICAL PROPERTIES

PROPERTY	N800BH	UNIT	TEST METHOD
Color	Pink	-	Visual
Surface tack 2-side/1-side	2	-	-
Thickness	Customized	mm	ASTM D374
Density	3.3	g/cm ³	ASTM D792
Hardness	50	Shore OO	ASTM D2240
Application temperature	-60~130	°C	-
Low molecular Siloxane (D3 to D20 total)	N.D	%	Gas Chromatography
ROHS & REACH	Compliant	-	-
COMPRESSION@1.0mm			
Deflection @10 psi	13	%	ASTM D5470 modify
Deflection @20 psi	34	%	ASTM D5470 modify
Deflection @30 psi	65	%	ASTM D5470 modify
ELECTRICAL			
Dielectric breakdown	8	KV/mm	ASTM D149
Surface resistivity	>10 ¹¹	Ohm	ASTM D257
Volume resistivity	>10 ¹⁰	Ohm-m	ASTM D257
THERMAL			
Thermal conductivity	11.0	W/m·K	ASTM D5470
Thermal impedance@10 psi	0.210	°C-in ² / W	ASTM D5470
Thermal impedance@20 psi	0.148	°C-in ² / W	ASTM D5470
Thermal impedance@30 psi	0.088	°C-in ² / W	ASTM D5470

The chemical formula indicates that if Cyclic polydimethylsiloxane (HO-[Si(CH₃)₂O]_n-H) is non-reaction, it's volatile anytime and everywhere. For example, when the electric products which has been put in a confined space, the volatile of low-molecular-weight siloxanes will makes the electric products uncontacted.

Thermal Impedance vs. Pressure vs. Deflection

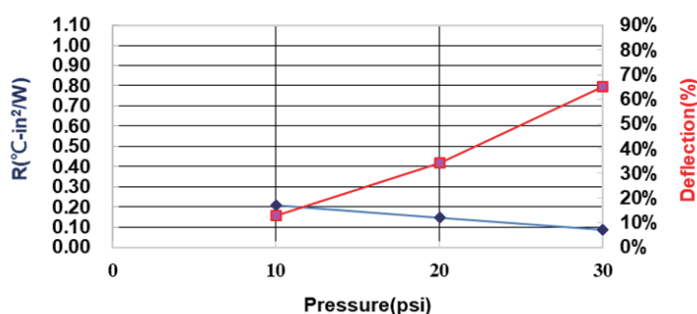

Note: All specifications provided by LiPOLY are subject to change without notice. The test methods used by LiPOLY are based on the TIM Tester method and ASTM D5470 test method. These test methods are used as the definition standards for LiPOLY. Property values provided in this document are not for product specifications or guaranteed. This document does not guarantee the performance and quality required for the purchaser's specific purpose. The purchaser needs to evaluate and verify the safety before using the material. We strongly recommend the purchaser pre-test the product and verify the performance of the product under the purchaser's specific conditions. Liability and use of the product are the responsibility of the end user. LiPOLY makes no warranty as to the suitability, merchantability, or non-infringement of any LiPOLY material or product for any specific or general uses. LiPOLY shall not be liable for incidental or consequential damages of any kind. All LiPOLY products are sold in accordance with the LiPOLY Terms and Conditions in effect at the time of purchase and a copy of which will be furnished upon request. All rights reserved, including LiPOLY trademarks or registered trademarks of LiPOLY or its affiliates. Statements concerning possible or suggested uses made herein shall not be relied upon or be constructed as a guaranty of patent infringement. Copyright LiPOLY.